

# LS-660T 6.5 Inch 60W 2-Way 70V/100V/8Ohms Quick Install In-Ceiling Speaker

**Product ID:** LS-660T



## **Short Description**

Rated power: 60W

Line input: 70V/100V/8?

Speaker driver: 6.5" PP + 1" silk tweeter

Frameless magnetic grille

## **Description**


**Versatile Ceiling Speakers for Public Address System, Home Background Music Systems, and Voice Alarm Systems.**

Enhance your audio experience with our state-of-the-art ceiling speaker, designed to meet the diverse needs of public address systems, home background music, and voice alarm evacuation systems. With a powerful 60W output, this speaker ensures clear and high-quality sound reproduction, making it a perfect choice for any environment.

## **Key Features:**

- **Versatile Input Options:**

Available in 8 Ohms and a combination of 70v/100v/8 Ohms input versions, catering to various installation requirements.

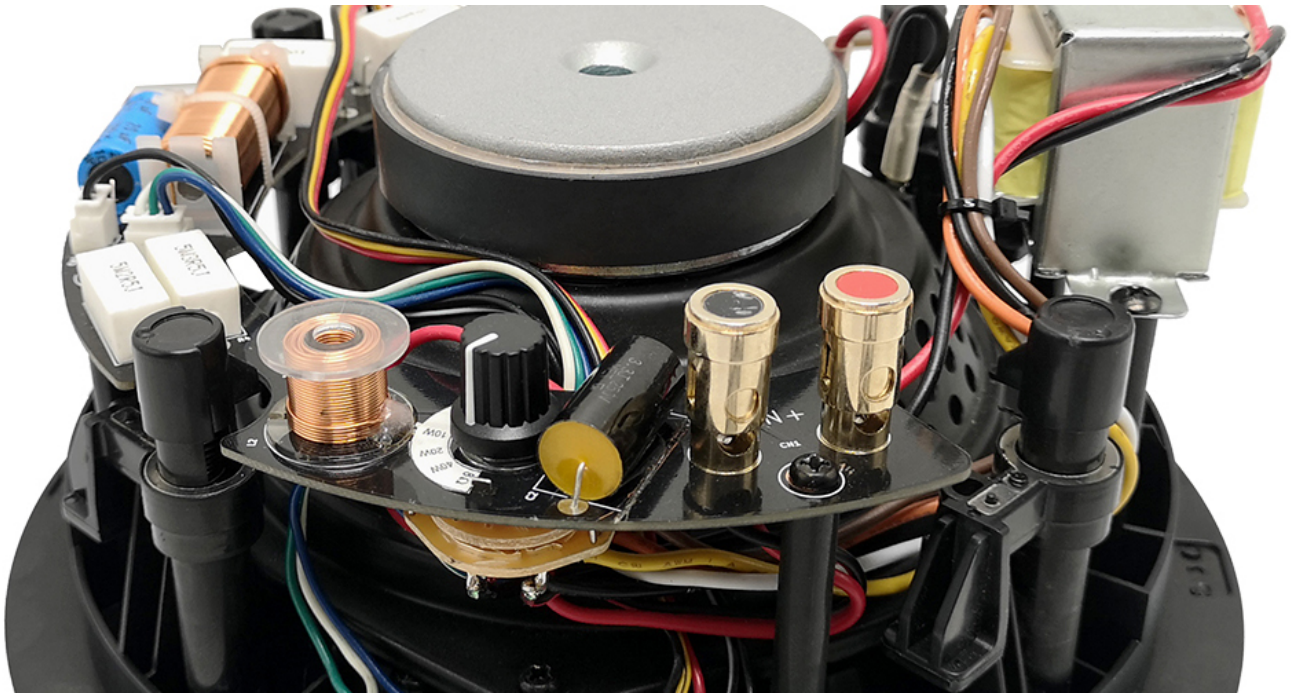

- **Superior Sound Quality:**

Equipped with a 6.5" polypropylene material cone woofer and a 1" pivoting silk soft dome tweeter, this speaker delivers exceptional audio clarity and depth.



- **Sound pressure level adjustment switch:**


Equipped with woofer & tweeter driver sound pressure level adjustment switch, allows you adjusting the sound pressure level according to your needs freely.



- **Easy In-Ceiling Installation:**

The innovative design allows for effortless installation.

Simply rotate the four knobs around the speaker, and the speaker mounts securely in the ceiling, saving you time and effort.

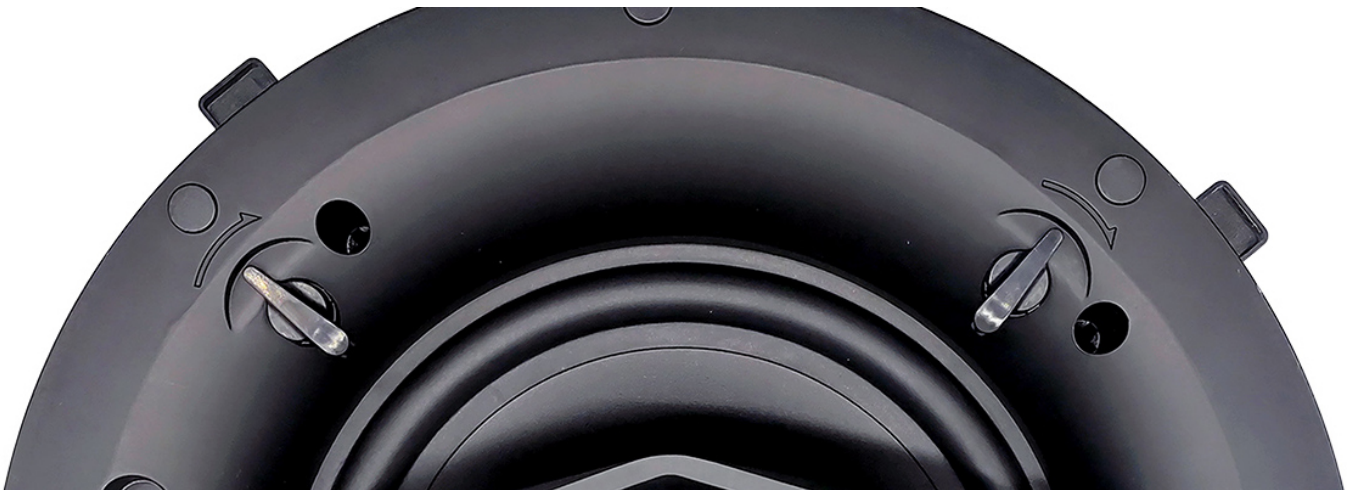

- **Robust and Reliable:**

Built for durability, this speaker is ideal for continuous use in public address and voice alarm systems, ensuring reliable performance when it matters most.

Transform your audio setup with this high-performance ceiling speaker, perfect for both commercial and residential applications. Enjoy seamless integration and superior sound quality, whether you're addressing a crowd or relaxing with your favorite music at home.

### Specification

Model	LS-660	LS-660T
Rated power	60W	60W
Power taps	-	5/10/20/40W (100V)
Impedance	8?	2K?/1K?/500?/250?/125? ±20% (70V)



		2K~/1K~/500~/250? ±20% (100V)
Line input	8?	70V/100V/8?
SPL	90±3dB	
Frequency response	57-20KHz	
Woofer speaker driver	6.5" PP cone	
Tweeter speaker driver	1" Pivoting silk soft dome	
Grille material	Iron	
Connector type	2 Pin press terminal	
Speaker mounting method	Quick install	
Product size	~229*101mm	
Mounting hole size	~204mm	
Net weight	3.95Kg	4.7Kg

Product Gallery



