# HS-6404/HS-6504/HS-6604/HS-6804 Indoor/Outdoor IP66 Waterproof Pendant Speaker



#### **Product ID:**

HS-6404/HS-6504/HS-6604/HS-6804

Phone: +86-20-39390663 - Email: sales@lyintl.com

#### **Short Description**

Rated power: 20W/30W/40W/50W

Line input: 70V/100V/8?

 $4''/5''/6\frac{1}{2}''/8''$  woofer + silk tweeter

IP66 All weatherproof

With optimal bass enhancement radiator

#### **Description**

HS-6 series outdoor on wall mount / ceiling pendant speakers are part of LYINTL's wall mount audio products line with very elegant and sleek housing design.


This seire is have 1 x 1" high frequency tweeter driver, and for low frequency woofer driver, 4", 5", 6.5" and 8" respectively.

Made from carefully selected premium grade material for durability, HS-5 series wall mount speakers come within the superior housing design with cutting edge audio component & parts that will deliver great audio sound results.




### **Exclusive OBE Technology**

Optimal BASS Enhancement (OBE) Technology delivers an outstanding deep and clear bass audio experience even without any extra subwoofer support.

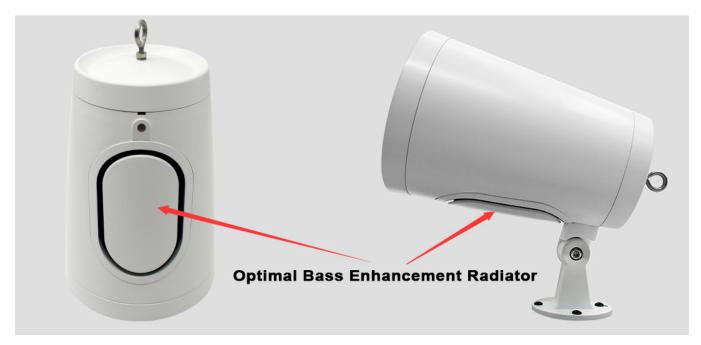

Ceiling pendant and wall mount kits are optional, suitable for both indoor and outdoor usage.

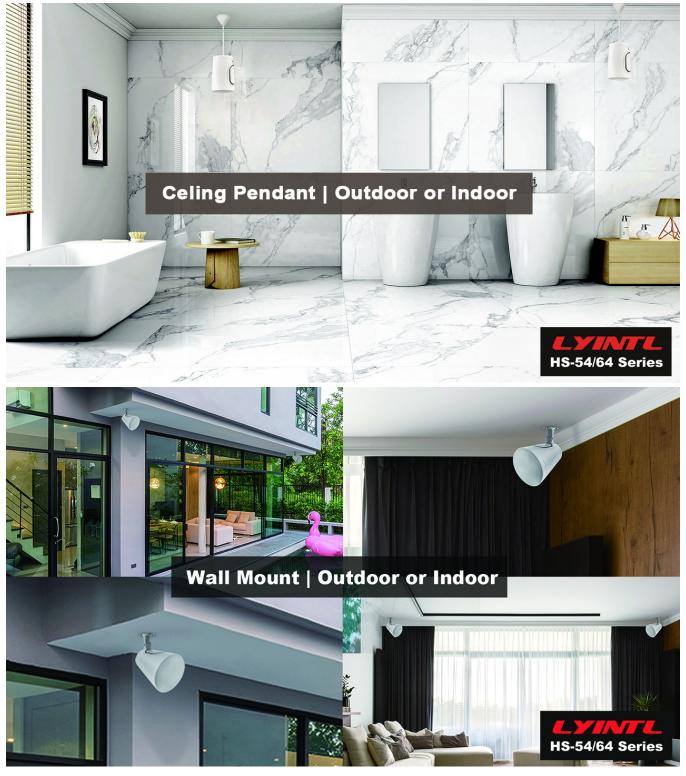

## **Specification**

- ? 3 mounting method: on wall mounted, ceiling pendant, and in-ground stand (8" only)
- ? Build-in 70V/100V transformer and 8? power taps
- ?  $1\times4$ ",  $1\times5$ ",  $1\times6\frac{1}{2}$ " or 1x8" graphite woofer speaker driver and 1" silk tweeter

- ? Rated output power: 20W, 30W, 40W or 50W
- ? IP66 all weatherproof, suitable for indoor and outdoor use
- ? White and black color for option

Specification

3.6.1.1	TTG < 10.1	TTG 6504	TTG	TTG 600.4
Model	HS-6404	HS-6504	HS-6604	HS-6804
Rated power	20W	30W	40W	50W
Power taps	2.5/5/10/20W/0	3.7/7.5/15/30W	5/10/20/40W/0/	6.25/12.5/25/50
	/8?	/0/8?	8?	W/0/8?
Line input	70V/100V/8?			
Output SPL	83±3dB	84±3dB	85±3dB	86±3dB
Freq. response	80Hz-20KHz	50Hz-20KHz	47Hz-20KHz	37Hz-20KHz
Woofer speaker	4"x1 Graphite	5"x1 Graphite c	6½"x1 Graphite	8"x1 Graphite c
	cone	one	cone	one
Tweeter driver	0.75"x1 silk	0.75"x1 silk	1"x1 silk dome	1.1"x1 silk
	dome	dome		dome
Waterproof	IP66			
Dimension	?235x147.8	?268x183.5	?282x214	?375x253.4
(H*W*D) (mm)				
Net weight	-	-	-	-
(Kg)				
Gross weight	-	-	-	-
(Kg)				
Packing	-	-	-	-
dimension				
(H*W*H) (cm)				

### **Product Gallery**

