

HS-8328 8 Zone Intelligent Multi-room Music System

Product ID: HS-8328



Short Description

Build-in MP3 player and digital tuner
8 independent stereo output
Support extension up to 72 zones max

Description

Intellegent High-tech Design

Ubiquitous Music Enjoyment




HS-8328 central control multi-room music system has below special functions:

- ? Built-in MP3 player, FM & AM digital tuner, with DVD, PC, TV, AUX audio input interface
- ? Support external USB port MP3 program input (flash disk, portable hard disk, MP3 player)
- ? RJ45 output connection
- ? 8 independent stereo audio output interfaces for 8 zones, support extension up to 72 zones max; independent volume / tone control; optional audio sources input for each zone
- ? 1 channel of DVD audio input interface, 2 channel of AUX audio input interface
- ? Console panel control and remote control available
- ? Timing control is available for each zones, up to 100 timing points can be programmed each day, and 7 days per week
- ? Every zone adopts the stereo output, rated output power:
Zone No.1: 2x100W
Zone No.2-8: 2x30W
- Extending power amplifier, four zones rated output power: 2x30W
- ? Equipped with RS-232 communication interface and TCP/IP network interface, can interlink with intelligent central control systems or intelligent home systems
- ? Infrared learning function for remote control of external audio equipment
- ? All-digital audio processing technology which can realize Hi-Fi sound quality
- ? Support online software upgrading and time calibration automatically
- ? Equipped with brand-new control software including IOS and ANDROID platforms



1. USB interface (USB2.0)
2. Power light (POWER)
3. Power switch (POWER)
4. TFT true color display screen

1. DVD audio input interface
2. Auxiliary audio input interface
3. Audio signal line output port
4. Network interface
5. Extending power amplifier interface
6. Infrared study input/output
7. RS232 interface
8. Control panel interface
9. AC220V/6A power fuse
10. AC220V power input interface
11. Audio signal output from zone 1 to zone 8

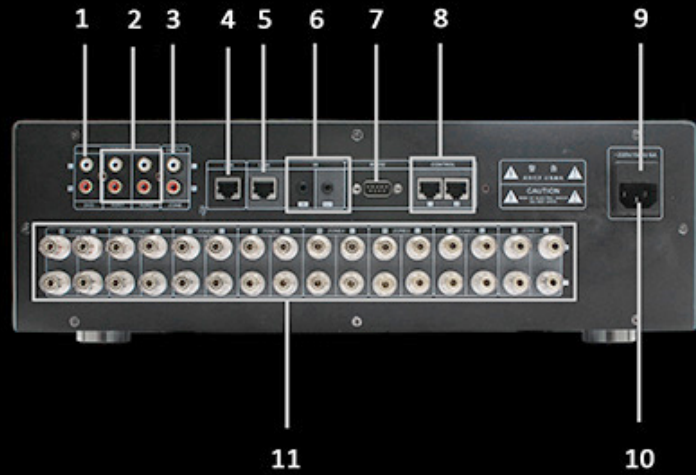

Specificaliton

Item	Parameter	
Zone quantity	8 zone	
Audio indicator	Line input sensitivity	520mV (\pm 50mV)
	Line input resistance	>10k Ω
	Rated output power	Zone 1: 2 \times 100W/8 Ω ?
		Zone 2-8: 2 \times 30W/8 Ω ?
	Frequency response	20Hz-20kHz (\pm 0.5dB)
	T.H.D	<0.3% (f=1kHz, 1/3 of rated output power)
	S/N	>81dB
AUX audio output	Stereo output: 520mV (\pm 50mV)	
Output protection	Output short circuit, overloading, direct current protection	
Power supply	AC220-240V/50-60Hz	
Total power	600W	
Power protection	AC220V/F6A	
Product dimension (LxWxH)mm	430 \times 345 \times 132	
Packing dimension (LxWxH) mm	540 \times 540 \times 230	
Net weight (Kg)	14.6	
Gross weight (Kg)	19.0	

Product Gallery



HS-8328 System Connection Diagram

