

PM-2107C Multi Media Player with CD/USB/FM/Bluetooth

Product ID: PM-2107C



Short Description

Combined with MP3/MP4/CD/VCD/DVD/FM/AM/Bluetooth
Stereo L/R output

Description

This multi audio player is coming with with CD playback, radio and Bluetooth function;

Supports a variety of audio playback, including CD, USB, SD, Bluetooth and FM/AM
radio signals (can store 40 stations respectively);

Full light touch button control and blue LCD display with high brightness to display clear
working status of the audios;

1-way mixed output


1-way Bluetooth stereo output (L/R)

1-way radio signal stereo output (L/R)

1-way CD/MP3 audio stereo output (L/R)

Mixed output supports simultaneous output of 3-way audio of Bluetooth, radio signal and
CD/MP3, which meets various requirements in the application scenes.

The **mixed output** supports **simultaneous** output of three-way audio of Bluetooth, radio signal and CD/MP3

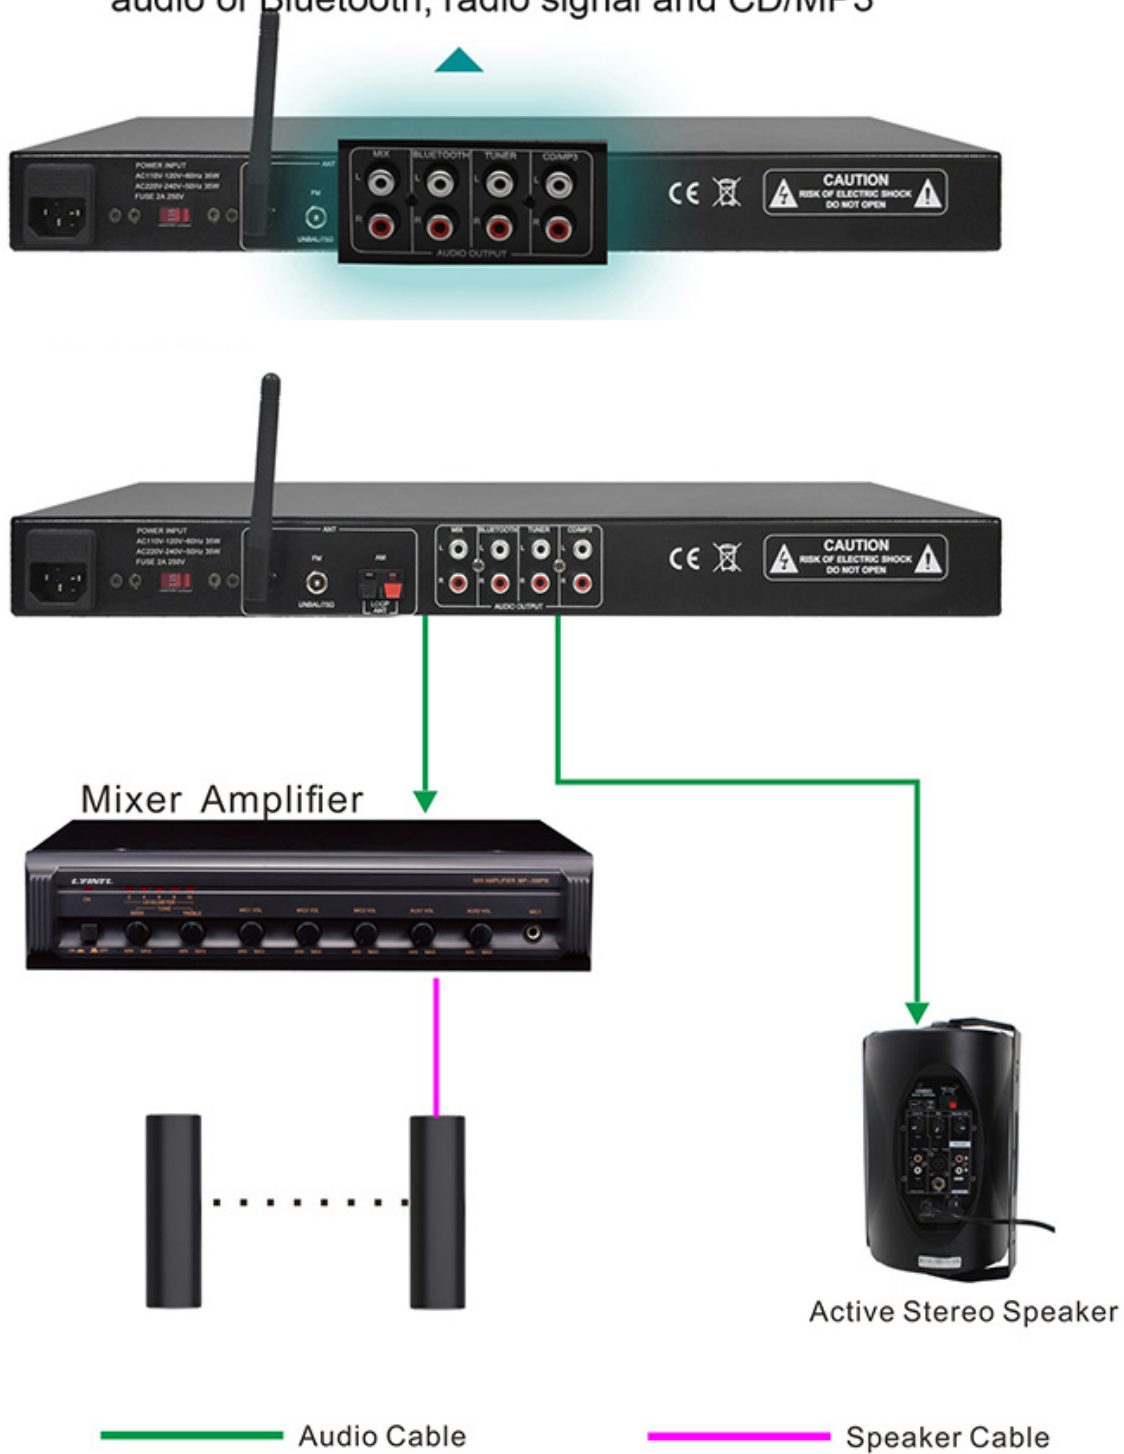

Specification

Model	PM-2107C	
Laser Player	Maximum output voltage 1KHz -10dB signal	1000±100mV

	Frequency response range	20-19KHz(± 1 dB)
	THD	$\approx 0.3\%$
	Noise	≈ 0.02 mv
USB	Maximum output voltage	1000 \pm 100mV
	Frequency response range	20-19KHz(± 1 dB)
	THD	$\approx 0.3\%$
	Noise	≈ 0.02 mv
SD	Maximum output voltage	1000 \pm 100mV
	Frequency response range	20-19KHz(± 1 dB)
	THD	$\approx 0.3\%$
	Noise	≈ 0.02 mv
Bluetooth	Maximum output voltage 1KHz -10dB	1000 \pm 100mv
	Frequency response range	20-19KHz(± 2 dB)
	THD	$\approx 0.3\%$
	Noise	≈ 0.06 mV
	Distance	Best within 10M
Radio function(FM/AM)	Maximum output voltage	1200 \pm 100mV
	Amplitude limiting sensitivity	-80dB
	Frequency response range	40-10KHz(± 3 dB)
	Distortion	$\approx 0.2\%$
	SNR	≈ 60 dB
	Store/Memory function	40 pcs
Protection	AC fuse	
Power supply	AC110-120V/60Hz/35W AC220-240V/50Hz/35W	
Packing dimension (mm)	534 \times 350 \times 110 (L \times W \times H)	
Machine dimension (mm)	483 \times 210 \times 44 (L \times W \times H)	
Gross weight (Kg)	4.4	
Net weight (Kg)	3.65	

Product Gallery

